

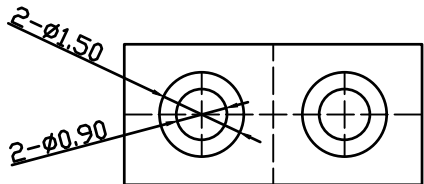
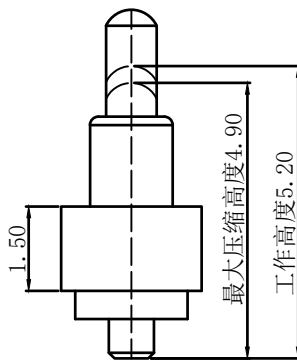


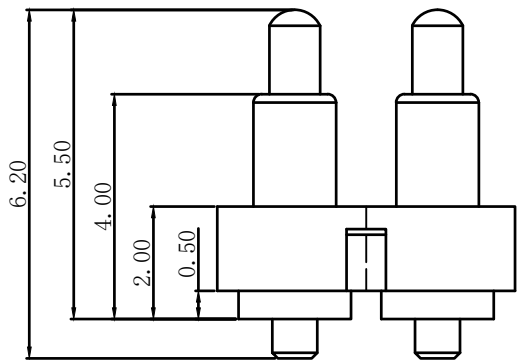

变更记录			
版本	变更描述	日期	设计者
A0	新版发行	2018.12.20	

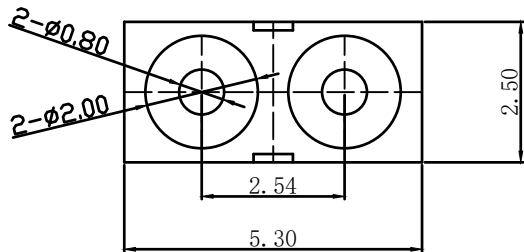

NOTES:

1.0 PLATING:

- 1) Contact plating: brass Au4u" over 50-80u" Ni
- 2) Contact solder area plating: brass Au2u" over 50-80u" Ni
- 3) Spring: SUS304
- 4) Housing: PA46, 黑色

2.0 Rated voltage (Per Contact): 36 Volts

3.0 Rated Current (Per Contact): 1A maximum

4.0 Insulation Resistance: 100MEGAOHMS Minimum

5.0 Dielectric Withstanding Voltage: 100VRMS AT 60HZ

6.0 Contact Resistance: 30mΩ maximum before test and 60mΩ maximum after test at pogo pin working stroke

7.0 Recommended Working Stroke & Force:

- 1) Stroke 1.0mm (Per Contact): 35±20gf

8.0 Mechanical life:

- 1) Mechanical life: 30,000 Cycles Min

9.0 Working Temperature Range: -30°~85°

POMAGTOR		深圳市泰科汉泽精密电子有限公司					
磁性连接—专业为您定制		Pomagtor Precision Electronics					
品名描述	2PIN支架连接器 PH2.54 2.0*6.2弹针					版本	A0
料号	HY91.00554-001	图档编号		单位	mm	比例	Free
项次	零件料号	规格描述	用量	视角	公差:	绘图/日期	审核/日期
2	HY90.00942-001	2.0*6.2 POGOPIN 材质C3604 针头镀金4U 针管镀金2U 弹力35gf	2PCS			付佳浩	
1	HY80.00006-002	2PIN塑胶支架 PH2.54 材质PA46黑色	1PCS			2018.12.20	
				未标注 公差:	x. ±0.20 .x ±0.15 .xx ±0.10	x° . ±2° .x° ±0.5°	核准/日期