

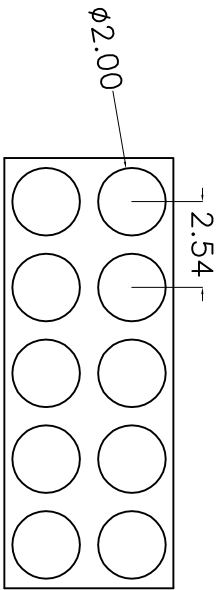
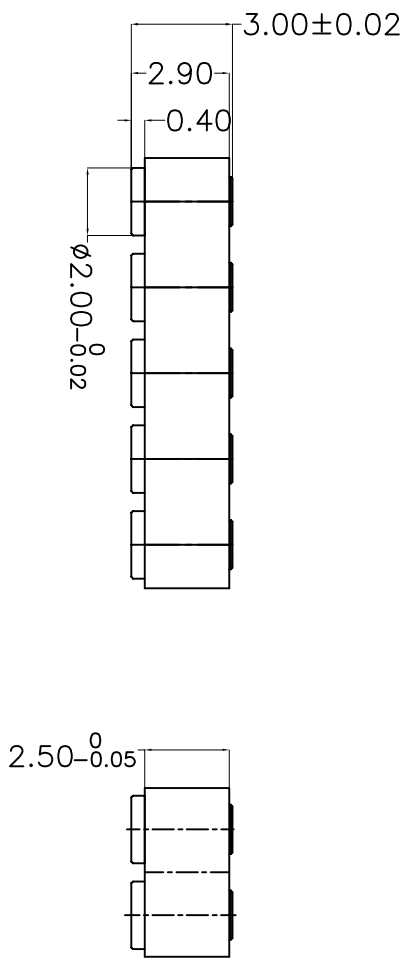



| 序号 | DESCRIPTION | REV | DESIGN | DATE |
|----|-------------|-----|--------|------|
| ① | | | | |
| ② | | | | |

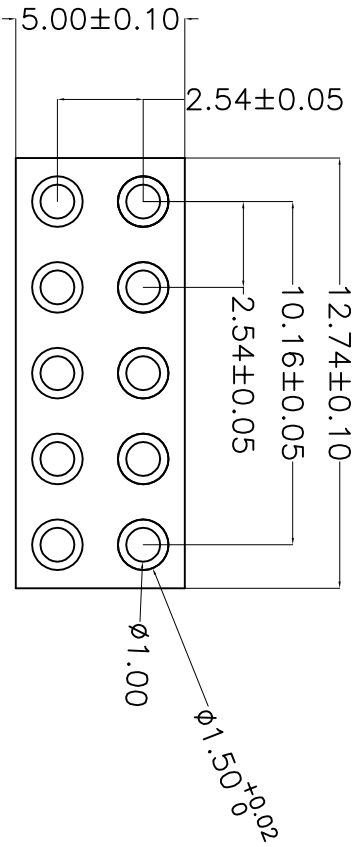

- NOTES:
- 1.0 PLATING:
1) Pover Pin: brass Au5u" over 50-80u" Ni
4) Housing: LCP 265"MAX
 - 2.0 Rated voltage(Per Contact): 12 Volts
 - 3.0 Rated Current(Per Contact): 5A maximum
 - 4.0 Insulation Resistance: 100MEGAOHMS Minimum
 - 5.0 Dielectric Withstanding Voltage: 100VRMS AT 60HZ
 - 6.0 Contact Resistance: 50mΩ maximum before test and 60mΩ maximum after test at pogo pin working stroke
 - 7.0 Recommended Working Stroke&Force:
 - 8.0 Working Temperature Range: -30~85°

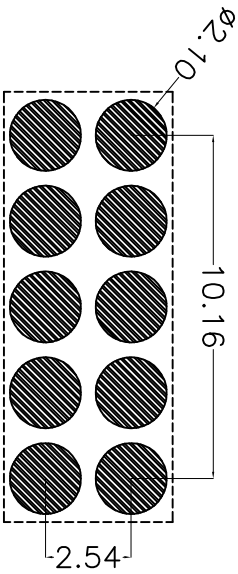

PCB LAYOUT
Layout Tolerance: ? .05mm


深圳市泰科汉泽精密电子有限公司
Tyco Hanconn Precision Electronics

| | | | | | |
|---------|----------------|-------|-----------------|------------|-----|
| 产品名称 | 10PIN磁铁连接器 | 产品规格 | 2.0*3.00 2.54PH | 版本 | A0 |
| 产品编号 | HY91-00154-002 | 使用材料 | | 比例 | 1:1 |
| 表面编号 | | 表面处理 | (见附表) | 单位 | mm |
| 未注尺寸公差: | ±0.10 | 绘图/日期 | 邹巧云 | 2014-11-25 | |
| 未注角度公差: | ±1° | 审核/日期 | | | |