




REV'	ECN NO'	LOCAS'	DESCRIPTION	DATE	DESIGN
A0			NEW	2012.02.13	譚立強

Material	packing
PE Bag	1.OK

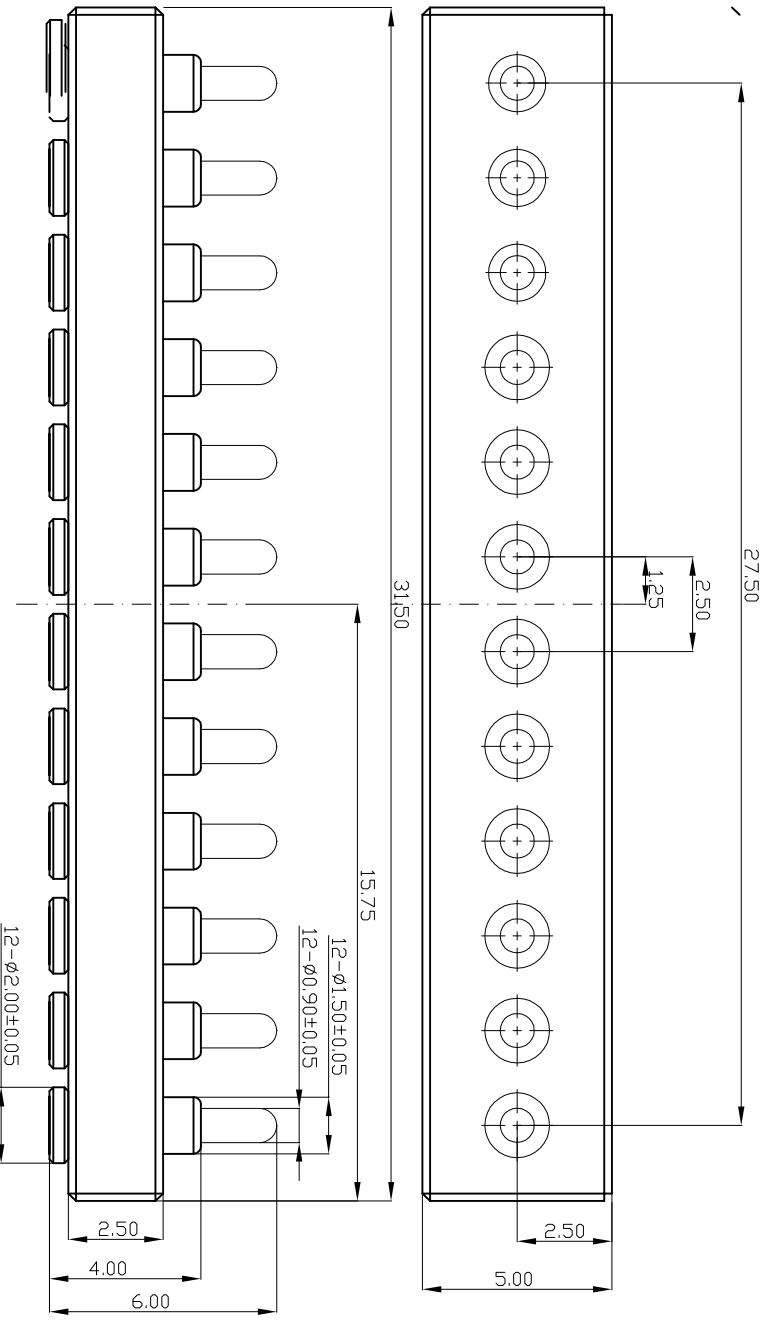

- NOTES:
- 1) CONTACT PLATING: brass Au1u" over 50-120u" Ni
  - 2) CONTACT SOLDER AREA PLATING: brassAu1u" over 50-120u" Ni
  - 3) Spring: SUS
  - 4) Housing: LCP 265\*MAX
  - 2.0 Rated voltage(Per Contact): 12 Volts
  - 3.0 Rated Current(Per Contact): 1.2A maximum
  - 4.0 Insulation Resistance: 100MEGAOHMS Minimum
  - 5.0 Dielectric Withstanding Voltage: 100VRMS AT 60HZ and 60m maximum after test at pogo pin working stroke
  - 6.0 Contact Resistance: 30m maximum before test
  - 7.0 Recommended Working Stroke&Force:
    - 1) Stroke 1.0mm(Per Contact):150gfMax
    - 8.0 Mechanical life:
    - 1) 1.0mm(Mechanical life):30,000 Cycles Min
    - 9.0 Working Temperature Range: -30~85°

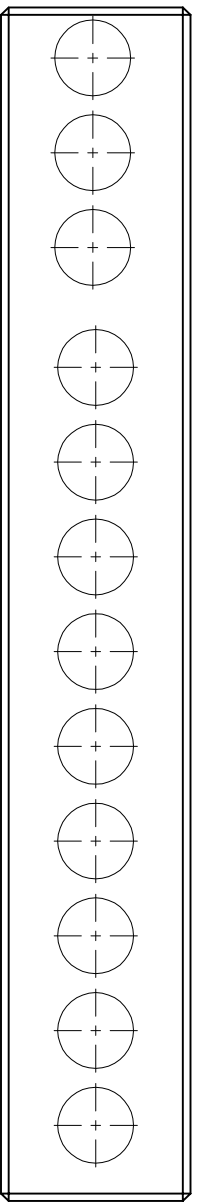

  
 深圳市泰科汉泽精密电子有限公司  
**Tyco Hancorn Precision Electronics**

DRAW NO.		DATE		DRAW NAME:	
DESIGN: 譚立強		2012.02.13		FINISH-AU1~3u",Ni,80~120u"	
CHECK: X.X		FILE: P/N:HT91-00034-001		SPE TABLE	
REVIEW: X.XX		REV. A0		SCALE N/A	
UNIT: mm		SHEET: 1/1		DRAWING SYMBOLS	

DIM	TOL	DIM	TOL
X.X	±0.20	X"	3"
X.XX	±0.15	X.XX"	X.XX"