

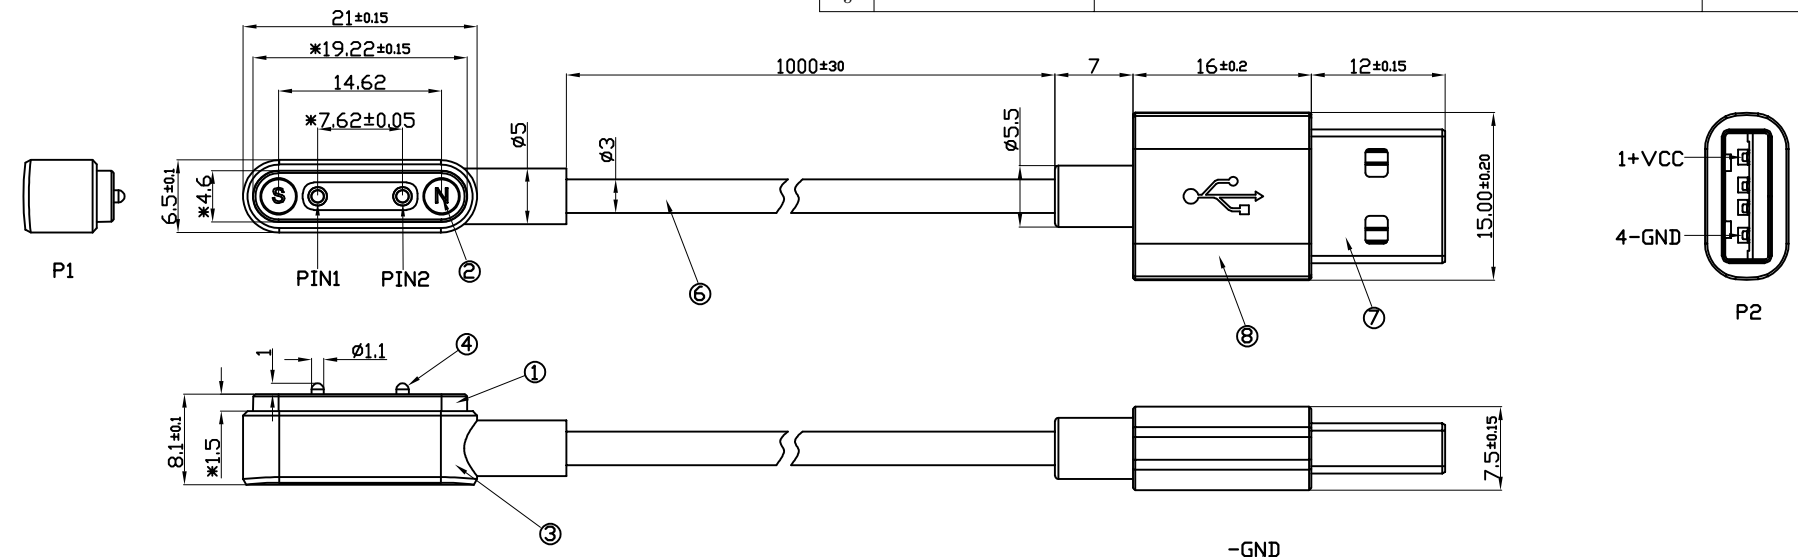


REV	ECN NO.	DETAILS	BY	DATE
1	A0	新版发行	CJ	2023/04/29
2				
3				

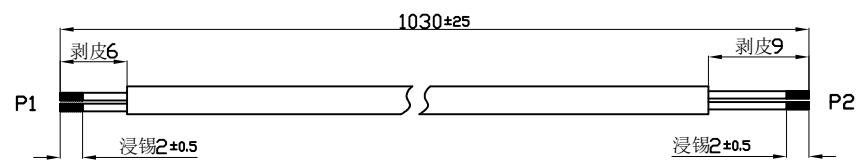

- 技术要求:
- 1.0 a. 100%开路/短路测试。
b. 导通阻抗: 0.3Ω (Max.).
c. 绝缘阻抗: 300V/DC 10MΩ (min).
 - 2.0 电气性能:
 - 1) 额定电压 (PIN接触): 5伏
 - 2) 额定电流 (PIN接触): 2A
 - 3) 耐压测试: 100V AT 60Hz.
 - 4) 工作弹力: 按压行程1.0mm, 每个触点60gf±20%
 - 5) 寿命测试: 按压行程1.0mm, 10,000 次 Min.
 - 3.0 工作温度范围: -30 ~+75° C.
 - 4.0 摇摆测试: 吊重200g, ±60°, 30次/分钟, 2000次导通无不良.
 - 5.0 重点管控尺寸用“*”号表示.
 - 6.0 产品必须符合最新的RoHS

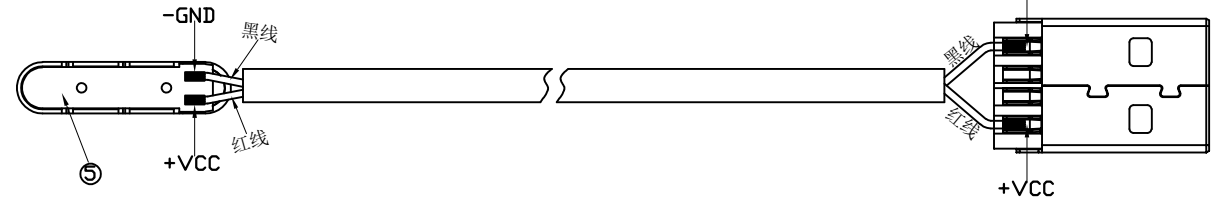

接线表	
P1	P2
PIN1	+VCC红线 1
PIN2	-GND黑线 4

8	-	内外模	胶料 TPE 93A 黑色 RoHS2.0+HF	1pcs	-
7	-	USB	GTX02 USB A/M 短体180度 焊线式 黑色胶芯 PIN镀金G/F 铁壳 过盐雾24H 汗液8H 无卤 防火V94-0	1pcs	-
6	-	线材	24AWG*2C (40/0.08TS+500D) (红, 黑) TPE阻燃黑色外被, OD: 3.0环保符合 ROHS, REACH HF 环保要求	1035M	-
5	-	PCB	FR-4 绿油白字 无铅喷锡 无卤	1pcs	-
4	-	弹针	HIB59-1.5镀镍50-120u” 针头针管镀金50” 盐雾48H	2pcs	-
3	-	外壳	PA9T黑色 UL94V-0 产品须符合PAHS+RoHS2.0+REACH+无卤	1pcs	-
2	-	磁铁	N52 镀镍120u” 盐雾48H	2pcs	-
1	-	底壳	PA9T黑色 UL94V-0 产品须符合PAHS+RoHS2.0+REACH+无卤	1pcs	-
序号	料号	零件名称	规格描述	用量	备注

*UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES
LINEAR TOLERANCE:
X±0.20 .X±0.15 .XX±0.10
X*±2° .X*±0.5°
Pomagtor
Website:www.pomagtor.net

POMAGTOR
PROFESSIONAL CUSTOMIZATION SINCE 2007
HIGH FREQUENCY POGO PIN .MAGNETIC CONNECTOR

ITEM	HT-2PIN-6磁吸公座连接线 TPE黑色 L=1M	REV	A0	DRAWN BY	CHECKED BY	APPROVED BY
S/N.	-	SCALE	1	CJ		
RD.S/N.	RD90.CJ0230504-003	UNIT	mm			
VEIW ANGLE		DATE	2023/05/04			
		SHEET	1 of 1			