


- NOTES:
- 1.0 PLATING:
 - 1)Contact plating:brass Au10u"over 50-120u" Ni
 - 2)Contact solder area plating: brassAu 10u" over 50-120u" Ni
 - 3)Spring: SUS
 - 2.0 Rated voltage(Per Contact): 5 Volts
 - 3.0 Rated Current(Per Contact): 2.5A
 - 4.0 Insulation Resistance: 100MΩ minimum
 - 5.0 Dielectric Withstanding Voltage: 100V at 60HZ
 - 6.0 Contact Resistance: 30mΩ maximum before test and 60mΩ maximum after test at pogo pin working stroke
 - 7.0 Recommended Working Stroke&Force:
 - 1)Stroke2.05mm(Per Contact);100gf±30gf
 - 8.0 Mechanical life:
 - 1)Mechanical life: 10,000 Cycles
 - 9.0 Working Temperature Range: -30~85°

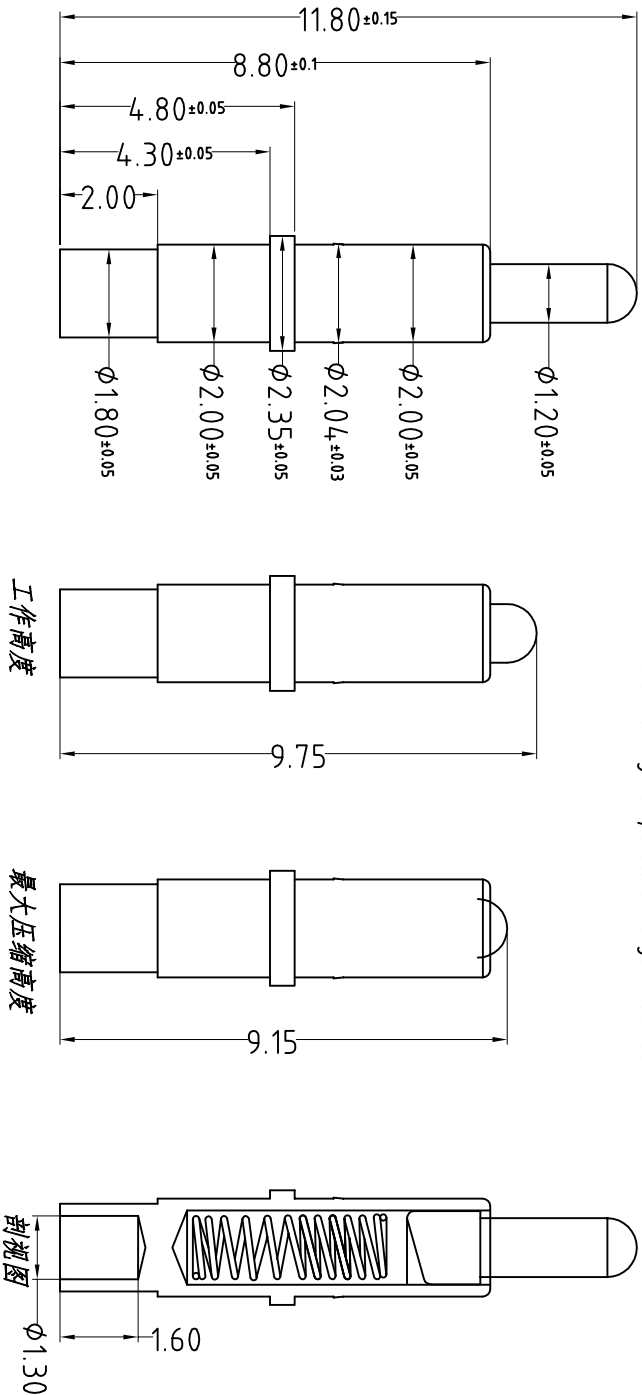

模架号	模架号	POMAGTOR		磁性连接—專業為您定制		深圳市泰科汉泽精密电子有限公司		Pomagtor Precision Electronics	
变更描述	原因	设计者	日期	描述	料号	2.35*11.8PPOGCPIN,C3804,AU10U"	单位	MM	版本
1									A1
2									
3									

变更说明	1	2	3	4	5	6
1						
2						
3						